

ALN024030.244


PHASE CUT

220
~CV
out

- +

Class II

1

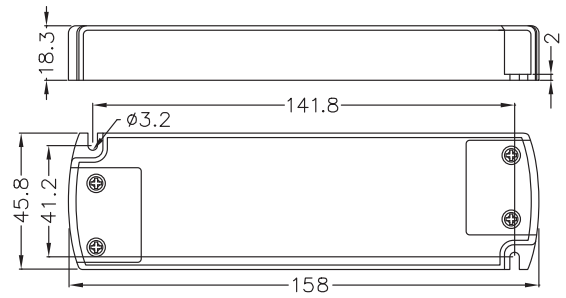

Dimmable	TRIAC/IGBT
Dimming range	20~90%
Power Factor (PF)	≥0.9
t _c	+85°C
t _a	+45°C
Dimensions	158 x 45.8 x 18.3 mm

Input Vac	Vdc	Output CC	W
200~240V (50/60Hz)	24V	0.2~1.25A	5~30W

Fissaggio cavi / Cable fixing
Morsetti a vite / Screw fixing

Approvazioni / Approvals

SELV

