

# CNT011.00

Cavo tondo flessibile bipolare  
Bipolar flexible round cable




2x



Divisibile, doppio isolamento **PVC+PVC**  
Divisible, **PVC+PVC** double insulation



Per Driver e Alimentatori SNAPPY 6W e 12W  
For drivers and SNAPPY power supply (6W or 12W)

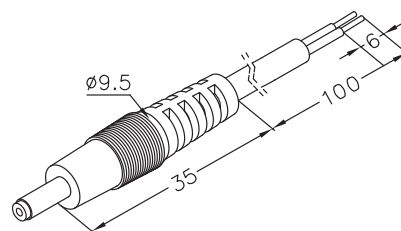

| Codice<br>Code | Colore guaina<br>Sheath colour                                                    | mm <sup>2</sup><br> | <br>Ø mm | <br>Ø mm | Lunghezza<br>Length | T <sub>max</sub> °C | APPROVAL | <br>V | <br>CuSn |
|----------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------|---------------------|----------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| CNT011.00      |  | 2 x AWG22                                                                                            | 2 x 1.45                                                                                  | 4                                                                                         | 100 cm              | 80°                 | UL       | 300                                                                                      | CuSn                                                                                        |