

DRD0700036.240




PHASE CUT

220
~CC
out

- +

Class II

1

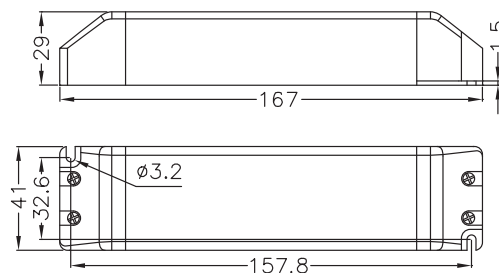

Input Vac	CC	Output Vdc	W
200~240V (50/60Hz)	700mA	25.5~51V	18~36W

Fissaggio cavi / Cable fixing

Morsetti a vite / Screw fixing

Approvazioni / Approvals

SELV



Dimmable	TRIAC/IGBT
Dimming range	15~95%
Power Factor (PF)	≥0.95
t _c	+80°C
t _a	+45°C
Dimensions	167 x 41 x 29 mm

Tolleranze / Tolerances

Valori elettrici / Electrical values (@25°): ±5%

Dimensionali / Dimensional: ±0.3/0.5mm