

DRS0350009.170


Driver LED a spina integrata a corrente costante
Wall mount constant current LED driver



Input (Vac)	200~240V (50/60Hz)
(CC)	350mA
Output (Vdc)	9~30V
(W)	3~9W
t _c	+80°C
t _a	+45°C
Dimensioni / Dimensions	92.5 x 49 x 28 mm
Colore / Colour	Trasparente / Transparent

Tolleranze / Tolerances

Valori elettrici / Electrical values (@25°): ±5%

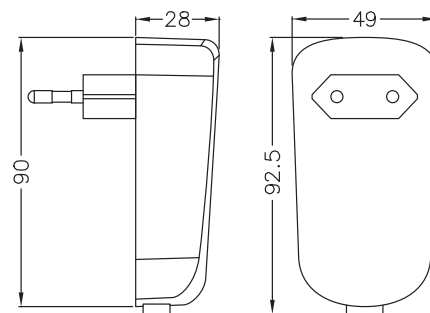

Fissaggio cavi / Cable fixing

Connettore femmina 2 poli DIN +/-
2-pole DIN +/- female connector

Approvazioni / Approvals

