


SL75-24VFT



220

CV
out

Class II

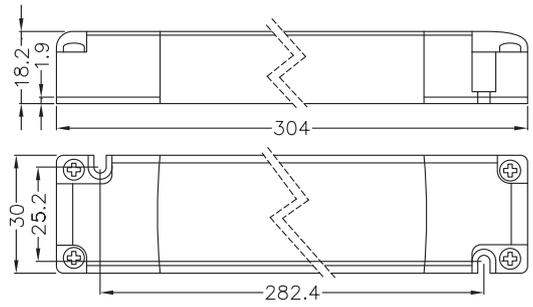

Input Vac	Vdc	Output CC	W
200~240V (50/60Hz)	24V	0.625~3.125A	15~75W

Fissaggio cavi / Cable fixing

Morsetti a vite / Screw fixing

Approvazioni / Approvals

SELV



Dimmable	TRIAC/IGBT
Dimming range	1~100%
Power Factor (PF)	≥0.98
t _c	+85°C
t _a	+45°C
Dimensions	304 x 30 x 18.2 mm