

# SP50-24VFT-1

PHASE CUT




220  
~

CV  
out

-  
+

Class II

1

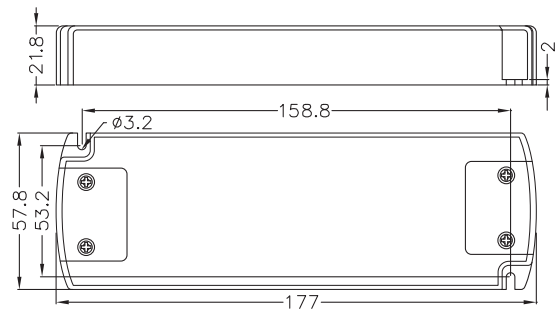

Dimmable	TRIAC/IGBT
Dimming range	20~90%
Power Factor (PF)	≥0.9
$t_c$	+85°C
$t_a$	+45°C
Dimensions	177 x 57.8 x 21.8 mm

Input Vac	Vdc	Output CC	W
220~240V (50Hz)	24V	0.5~2.08A	12~50W

Fissaggio cavi / Cable fixing  
Morsetti a vite / Screw fixing

Approvazioni / Approvals

SELV

