



PVC+PVC

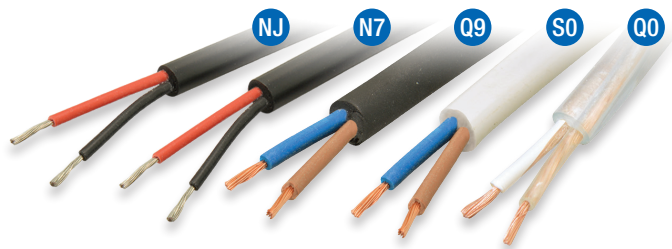

Cavo tondo flessibile bipolare
 Bipolar flexible round cable
 Doppio isolamento **PVC+PVC**
PVC+PVC double insulation



Codice Code	Colore guaina Sheath colour	Cavi interni Internal cables	mm ²	↓ ∅ mm	∞ ∅ mm	T _{max} °C	APPROVAL	V	↑
NJ	■	■ ■	AWG22	1.5	3.6	85°	UL / Style 2464	300	CuSn
N7	■	■ ■	AWG22	1.5	4.2	105°	UL / Style 2103	300	CuSn
Q0	□	□ □	0.75	2.2	5.3	70°	VDE	50/500	Cu
Q9	■	■ ■	0.75	2.2	5.3	70°	IMQ-HAR	300/300	Cu
S0	□	■ ■	0.75	2.2	5.3	70°	IMQ-HAR	300/300	Cu