

Schede LED e moduli LED
LED boards and LED modules **01**

Strip LED e profili in alluminio
LED strips and aluminium profiles **02**

Elettronica di controllo
Control electronics **03**

Sistema QUICK-LED
QUICK-LED system **04**

Driver LED e alimentatori LED
LED drivers and LED power supplies **05**

Sistemi di raffreddamento
Cooling systems **06**

PAD termici
Thermal PADS **07**

Ottiche, cover di protezione e collimatori
Lenses, protection covers and collimators **08**

Cavi e accessori
Cables and accessories **09**

Lampadine LED
LED bulbs **10**

Informazioni tecniche
Technical information **11**

10


Lampadine LED
LED bulbs




Indice capitolo
Chapter contents

| Lampadine LED / LED bulbs | pag. |
|---------------------------|------|
| Lampadine LED / LED bulbs | 283 |

Colore del LED
LED colour

 Bianco Caldo / Warm White Range temperatura di colore (CCT) disponibile da 2700K a 3200K in base al Bin LED utilizzato / Available from 2700K to 3200K CCT according to Bin LED used

Simbologia
Symbols

 Quantità minima / Minimum quantity  220Vac

Note
Notes

Le lampadine LED contengono componenti che sono sensibili alle scariche elettrostatiche e possono essere maneggiate solo utilizzando le adeguate protezioni. Durante le fasi di lavorazione è necessario prestare la massima attenzione a non danneggiarle e/o apportare modifiche alle stesse, ed evitare di collegarle ad un alimentatore/driver sotto tensione.

LED bulbs contain sensitive to electrostatic discharges and should be handled only using adequate protection. During assembly steps, be careful not to damage and/or modify them. Avoid connecting LED bulbs to a powered supply unit or driver.



3W

G903240W.CS001

● **Descrizione / Description**

Lampadina LED G9 con protezione in silicone.


G9 LED bulb with silicone cap.

● **CCT & Ra**

W Bianco Caldo/*Warm White*: 3000K Ra>80



A



| Codice Code | Colore del LED LED colour | Potenza massima Max power (W) | VAC | h mm | Flusso luminoso tipico Typical light flux (lm) |
|----------------|------------------------------|-------------------------------------|----------|------|--|
| G903240W.CS001 | W | 3 | 220~240V | 32 | 240 |



5W

G905240W.CS002

● **Descrizione / Description**

Lampadina LED G9 con protezione in policarbonato.


G9 LED bulb with polycarbonate cap.

● **CCT & Ra**

W Bianco Caldo/*Warm White*: 3000K Ra>80



A

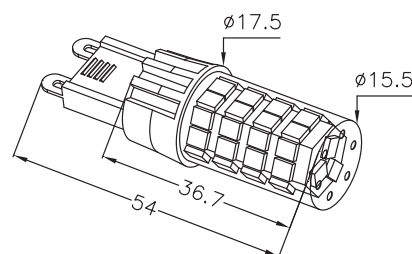

| Codice Code | Colore del LED LED colour | Potenza massima Max power (W) | VAC | h mm | Flusso luminoso tipico Typical light flux (lm) |
|----------------|------------------------------|-------------------------------------|----------|------|--|
| G905240W.CS002 | W | 5 | 220~240V | 36,7 | 450 |

